


Daylight Par 575W



SPECIFICATIONS

Identity No.	L00575DP
Capacity	575W
Lamp Bulb Voltage	95V
Protective Lens	Ø175mm (6-7/8 in.)
Par Lens	Ø175mm (6-7/8 in.)
Lamp Type	HMI 575W SE
Color Temp.	5600K
Lamp Holder	G22
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	5 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	5.2 kg
Weight (with barndoor)	5.8 kg

DIMENSIONS (mm)

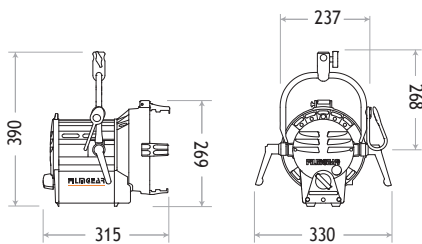

PHOTOMETRIC DATA

		3m	5m	7m
575W				
Spot (9°)	Lux	83636	30098	15356
	Beam Ø	0.47 m	0.79 m	1.10 m
Medium Flood (10° x 20°)	Lux	33947	12221	6235
	Beam Ø	0.52 x 1.06 m	0.87 x 1.76 m	1.22 x 2.47 m
Wide Flood (20° x 45°)	Lux	9516	3426	1748
	Beam Ø	1.06 x 2.49 m	1.76 x 4.14 m	2.47 x 5.80 m
Super Wide Flood (40°)	Lux	7272	2618	1336
	Beam Ø	2.18 m	3.64 m	5.10 m
Frosted Super Flood (35°)	Lux	5331	1919	979
	Beam Ø	1.89 m	3.15 m	4.41 m

LAMPHEAD CONTENTS

Lamp Housing without Bulb (purple grey & silver color)

4-leaf Rotatable Barndoor with Safety Wire

Ø175 mm (6-7/8 in.) Protective Lens

Set of 5 Par Lenses with Lens Case

Inlet Cable with Multi-Pin Connector

Stirrup with Ø16mm (5/8 in.) Socket

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

ACCESSORIES

Electronic Ballast V3 : 1.8kW/1.2kW/575W or 1.2kW/575W or 800W/575W or 800W/575W AC/DC
Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)

DC Cable 1.5m (5 ft.)

4-leaf Rotatable Barndoor

Set of 5 Par Lenses Ø175mm (6-7/8 in.) with Lens Case :

Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood

Set of 4 Scrims Ø197mm (7-3/4 in.) : Full Single, Full Double, Half Single, Half Double
Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)