


Daylight Fresnel 575W SE




■ SPECIFICATIONS

Identity No.	L00575DS
Capacity	575W
Lamp Bulb Voltage	95V
Fresnel Lens	Ø130mm (5-1/8 in.)
Lamp Type	HMI 575W/SE
Color Temp.	5600K
Lamp Holder	G22
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	5 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	6.4 kg
Weight (with barndoor)	7.0 kg

■ DIMENSIONS (mm)



■ PHOTOMETRIC DATA

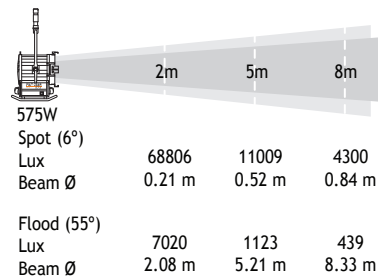

■ LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø130mm (5-1/8 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

■ ACCESSORIES

- Electronic Ballast V3 : 1.8kW/1.2kW/575W or 1.2kW/575W or 800W/575W or 800W/575W AC/DC
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- DC Y-Cable 1.5m (5 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrims Ø197mm (7-3/4 in.) : Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)