



Specifications

Lilliput 150 300W/650W -120/240V
yoke mount
kg.0,850

Lilliput 151 300W/650W - 120/240V
Clamp+ jointed arm mount
kg.1,150

Aluminum housing
Epoxy anti-scratch red finish: black colour on request
Heat resistant matt black finish on the inside
Extra-pure aluminum reflector
Lampholder G6,35
Fixed focus
Power cable 3,00 m. long, section 3x1,5 mmq
CEI 20-35 Flame retardant, Fire resistant
In-line switch 8Amp 250V (16Amp 125V)


Accessories

- Cod.153:** 115 gr.Wire guard with holder ring for barndoors and other accessories.
- Cod.159:** 215 gr. Four leaf barndoor with gel clips
- Cod.154:** 215 gr.Four leaf barndoor/wire guard assembly with gel clips
- Cod.152:** 190 gr. Accessory holder
- Cod.156:** 90 gr.Daylight dichroic filter
- Cod.157:** 90 gr. Safety glass
- Cod.158:** 90 gr. Diffuser glass
- Cod. PHO WD small:** White dome
- Cod.161:** 320 gr. Umbrella ø 80 cm.
- Cod.M026:** 50 gr. Umbrella universal adapter lite-tite
- Cod.106:** Mini Pro Alu stand (Minipro 051N)
- Cod.301:** Maxi Alu stand (compact 052)
- Cod.327:** Gag grip with 5/8" (16mm) spigot

Photometrics

DISTANCE 3 m (300w -120/240v)	
light center value	873
beam angle= beam at 50% peak value	47°
field angle= beam at 10% peak value	92°

Fitting halogen lamps with: G 6,35 (bi-pin) base.
64516 (300w - 3200°k) and 64540 (650w - 3400°k).

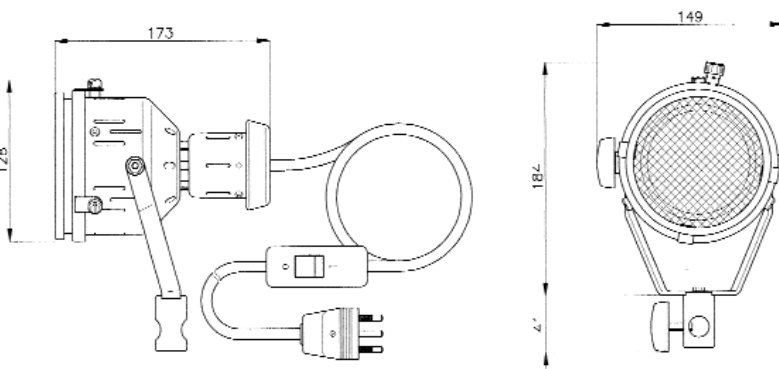

CODE 151



CODE 150