



KINO FLO
Lighting Systems

IMAGE LED



IMAGE L80

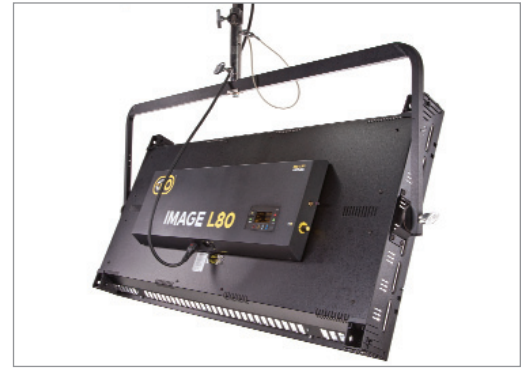


IMAGE L40

Image LED DMX



L80 DMX



L40 DMX



The Image L80 & L40 LED's join Kino Flo's family line of LED soft lights. With new technical innovations the Image LED features four menu options, one white, two colors and **FX**. In the white menu, Kelvin range is from 2700K to 6500K with **Dimming**, **Kelvin** and **Green/Magenta** control channels. In the first color menu, Kelvin is from 2500K to 9900K with three additional channels, **Gel**, **Hue Angle** and **Saturation**. The Gel channel includes Kino Flo presets and over 100 well-known lighting gels. The second color menu provides individual **RGB** (red, green, blue) control. The **FX** (Effects) menu has custom presets like Candle, Fire, TV, Police, Lightning, Paparazzi, Pulse and Scroll. The Image L80 & L40 also come with standard DMX and wireless DMX (Lumen Radio®), and universal input 100-240VAC.

The Image L80 & L40 LED's come complete with removable gel frame and louver and are available in Yoke mount and Pole-Op models.

Features include:

- Kelvin presets & custom settings, 2500K-9900K
- Dimming without color shift
- Green/Magenta control
- Dial in any color through Hue Angle and Saturation control
- Kino Flo presets and Gels
- RGB control
- FX (Effects) control
- Universal input 100VAC-240VAC
- Manual & DMX Dimming
- DMX wireless (Lumen Radio®)
- Gel Frame, Louver
- Yoke Mount & Pole-Op

▼ Photometrics

Image L80	FC	1330	491	244	143	96	68	52	41	32	27
	Feet	2	4	6	8	10	12	14	16	18	20
Image L40	FC	817	284	141	83	55	39	30	23	18	15
	Feet	2	4	6	8	10	12	14	16	18	20

Image L80	LUX	18600	7320	3730	2330	1480	1060	797	632	509	417
	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
Image L40	LUX	11200	4220	2140	1290	852	604	457	358	290	238
	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5

▼ Fixture Specifications

Fixture	Input Voltage VAC	Amps VAC	Kelvin Range	Dimming Range	Dimensions	Weight
Image L80 DMX Yoke	100-240VAC 50/60Hz, 400W	4A 2A	2500-9900	100-1%	54 x 6.5 x 28" (137 x 16.5 x 71cm)	41.5 lb (19kg)
Image L80 DMX Pole-Op	100-240VAC 50/60Hz, 400W	4A 2A	2500-9900	100-1%	54.5 x 6.5 x 28" (138.5 x 16.5 x 71cm)	45.5 lb (21kg)
Image L40 DMX Yoke	100-240VAC 50/60Hz, 200W	2A 1A	2500-9900	100-1%	54 x 6.5 x 17" (137 x 16.5 x 43cm)	25 lb (11.5kg)
Image L40 DMX Pole-Op	100-240VAC 50/60Hz, 200W	2A 1A	2500-9900	100-1%	54.5 x 6.5 x 17" (138.5 x 16.5 x 43cm)	27 lb (12kg)

▼ Details



▼ Image L80 LED DMX Kit



KIT-IML80U

Image L80 LED DMX Kit, Univ

Contents

- 1 Image L80 LED DMX
- 1 Jr. Pin
- 1 Ship Case

Dimensions

58 x 9.5 x 36.5"
(147.5 x 24 x 93cm)

Weight

75.5 lb
(34.5kg)

▼ Image L40 LED DMX Kit



KIT-IML40U

Image L40 LED DMX Kit, Univ

Contents

- 1 Image L40 LED DMX
- 1 Jr. Pin
- 1 Ship Case

Dimensions

58 x 9.5 x 25.5"
(147.5 x 24 x 65cm)

Weight

56 lb
(25.5kg)

▼ Image L80 LED DMX




IMG-L80U
Image L80 LED DMX Yoke, Univ



IMG-L80PU
Image L80 LED DMX Pole-Op, Univ



GFR-180
Image L80 Gel Frame (Included)



LVR-180-S
Image L80 Louver/Silver (Included)

▼ Image L40 LED DMX




IMG-L40U
Image L40 LED DMX Yoke, Univ



IMG-L40PU
Image L40 LED DMX Pole-Op, Univ



GFR-140
Image L40 Gel Frame (Included)



LVR-140-S
Image L40 Louver/Silver (Included)

▼ Image LED Accessories



BRD-180
Image L80 Barndoors



BRD-140
Image L40 Barndoors



MTP-180
Junior Pin Assembly for Yoke (28mm)



MTP-140
Baby Receiver Assembly for Yoke (16mm)



KAS-140-1
Image L40 Ship Case



KAS-180-1
Image L80 Ship Case



Kino Flo Lighting Systems
2840 North Hollywood Way
Burbank, CA 91505

+1 818 767 6528 voice +1 818 767 7517 fax

www.kinoflo.com
©Kino Flo IMAGE L80 & L40
No. 3110118